


ISI EnerShed L4

Energy Storage System

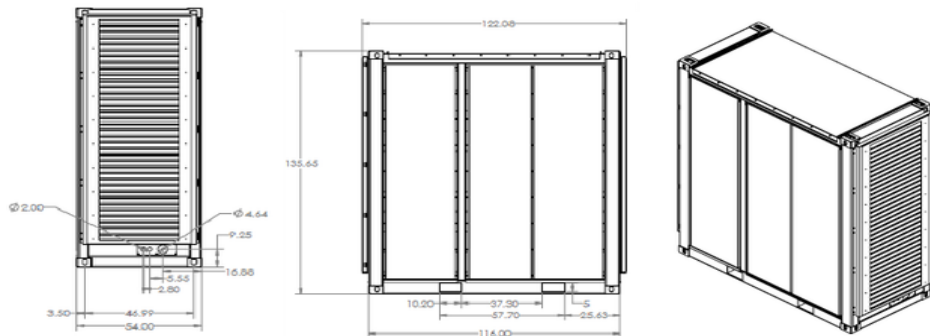

Model	ISI-ES-L4-06	ISI-ES-L4-07	ISI-ES-L4-08	ISI-ES-L4-09	ISI-ES-L4-10
AC Output Power (kW)	180	210	240	270	300
Usable Energy (kWh)*	600	700	800	900	1000
Weight (lbs)	19194	21238	23281	25325	27368
AC Max Current	240	280	320	360	400
Dimensions H x D x W (mm/in)	3429 x 3102 x 1372 / 135 x 122.08 x 54				
AC Voltage	480 V (+/-10%), 3 Phase, 3W + Gnd				
Operating Frequency	60 Hz (45 Hz - 65 Hz)				
PF at Rate Output Power	0.8 Leading - 0.8 Lagging				
THDi	< 3%				
Power Factor Correction	> 99%				
Corrosion Category IEC 61701	Category 5				
Noise Emission	65 dB(A)				
Thermal Management	Proprietary Forced Air				
Operating Temp Range	-30°C to 60°C (-22°F to 140°F)				
Storage Temp Range	5°C to 40°C (41°F to 104°F)				
Maximum Permissible Relative Humidity	95%				
Rated Altitude	3000 ft				
Enclosure	NEMA Type 3R				
Battery Chemistry	LiFePO4				
RTE	+90%				
Communication	SunSpec Over ModBus TCP/IP				
FCC	Class A				
Regulatory	UL9540, UL9540A, UL1741 SA/SB, IEEE 1547-2020, UL1642, UL1973				

*Nominal usable energy at AC terminals, Day 1.
Multiple units may be used on a single site.

Specifications subject to change
without warning. ISI Rev. 090226

45 Lynns Ct, Morrisville, PA 19067
800-967-5540 - quotes@invertersystemsinc.com



Inverter Systems, Inc.
partnered with Myers EPS



EnerShedTM



INVERTER SYSTEMS, INC.

In strategic
partnership with **MYERS**
EMERGENCY & POWER SYSTEMS

Smart · Clean · Energy

SMALLEST FOOTPRINT IN ITS CLASS

60kW to Multi-Megawatt

Multi-Family Residential · Commercial and Industrial Facilities
Education · Government · Utility



Inverter Systems, Inc.

www.invertersystemsinc.com